


Modem Installation

Telephone Line and Splitter

✓ Install the DSL splitter in the right position as follows:

1. Unplug your phone cable from the wall socket.
2. Plug the DSL splitter labeled "line" into the wall socket using the wires and splitter supplied in the modem box.
3. Plug the phone cable, which is connected to your telephone, into the splitter port labeled "Phone".
4. Plug the phone cable from your modem DSL port into the splitter port labeled "modem".

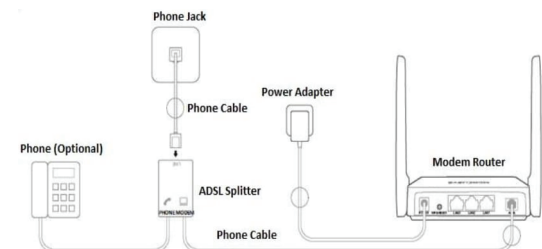

Note: If you have additional telephone sets, fax machine or other devices connected to the phone outlets at your premises, a splitter must be installed for each device and should be plugged into the side of the splitter that is labeled "PHONE".

✓ Power

1. Plug the power adapter in your power outlet.
2. Insert the power adapter wire into the modem power input.
3. Allow up to 5 minutes for booting.

Modem Configuration

Line Status

✓ Confirm that your line is connected, and your modem is ready for configuration:

1. DSL Led on the modem is lit solid green
2. Internet Led on the modem is flashing or solid green

Automatic Modem Configuration

✓ To confirm that your modem has been automatically configured, please visit the link <http://gds.com.lb>, in case the site opens normally, then your modem is successfully configured.



Connectivity Services Managed Services Security Services References



✓ In case the below pop-up message is displayed, you are requested to fill the information sent via SMS to your registered mobile number for the completion of the auto-configuration.


Login Name
Password
Mobile
E-mail

Submit

✓ If you are facing problems with the automatic configuration, please follow the below steps to get your modem manually configured.

Manual Modem Configuration

✓ Connect to the Wi-Fi network of your modem (Wi-Fi 's password is written on the back of the modem : MAC ID)

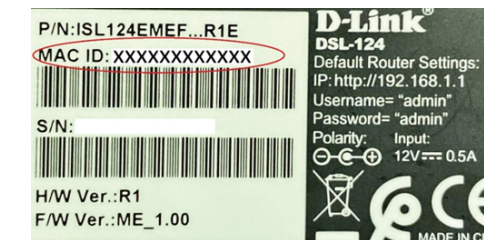

- ✓ Open any browser, and enter the gateway address (the default one is <http://192.168.1.1>)
- ✓ Login using the default router credential (Username : admin, Password : admin)
- ✓ Go to Quick start → Setup wizard → Welcome to D-Link router setup wizard (click next)



WELCOME TO D-LINK SETUP WIZARD

This wizard will guide you through a step-by-step process to configure your new D-link router and connect to the Internet.

- Step 1: Interface Type
- Step 2: Change Device Login Password
- Step 3: Set Time and Date
- Step 4: Setup Internet Connection
- Step 5: Configure Wireless Network
- Step 6: Completed and Apply

Next Cancel

1. Select DSL WAN then click next.

STEP 1: SELECT WAN INTERFACE TYPE → 2 → 3 → 4 → 5 → 6

Please select which WAN interface to use: DSL or Ethernet WAN

Select Interface Type DSL WAN Ethernet WAN

Note: The router will restart if you change from DSL to ETH or ETH to DSL
Once done restarting, you can just continue where you left of

Next Cancel

2. Changing device login password. Please type a password of your choice or click skip.

3. Set time and date and click next.

4. Setup internet connection:

- Country : other
- Internet service provider : other
- Protocol : PPOE
- VPI* : 0 or 8
- VCI : 35
- Username* : XXXXXXX@idm.net.lb
- Password* : XXXXXX

1 → 2 → 3 → STEP 4: SETUP INTERNET CONNECTION → 5 → 6

Please select your Country and ISP (Internet Service Provider) from the list below
If your Country or ISP is not in the list, please select "Others".

Country : Click to Select ▼

Internet Service Provider : Others ▼

Protocol : PPPoE ▼

Connection Type : LLC ▼

VPI : 0 (0-255)

VCI : 35 (32-65535)

PPPoE

Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click "Next" to continue.

Username : Lxxx@cyberia.net.lb **Password :**

Confirm Password :

Back Next Cancel

- * Please Note that your VPI, Username and Password are sent by SMS to the registered mobile number.

5. Configure Wireless Network: choose a network name in wireless network name SSID and a Wi-Fi's password in WPA2-preshared key.

1 → 2 → 3 → 4 → STEP 5: CONFIGURE WIRELESS NETWORK → 6

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

Enable Your Wireless Network

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) : DLINK-2768 (1~32 characters)

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status : Visible Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

Security Level:

None WEP WPA-PSK WPA2-PSK

Security Modes: WPA-PSK
Select this option if your wireless adapters support WPA-PSK.

Now, please enter your wireless security key.

WPA2 Pre-Shared Key:
%Fortress123&

6. Click Completed and apply: press on start button.

Modem Configuration